

Rapid lock pull rings , galvanised.


Revised: 16.06.2020

Rapid lock pull rings [f.lyn] are electro-galvanised and used for fast, tight assembly of duct systems.

Fitted with an insert which provides a dust-resistant joint and provides stability to the duct system, ensuring electrical conductivity through the assembly.

2 and 3 mm duct systems are fitted with a rapid lock pull ring with an insert which facilitates a larger size.

A silicon insert is required for temperatures above 80°C, which can tolerate temperatures up to 275°C.

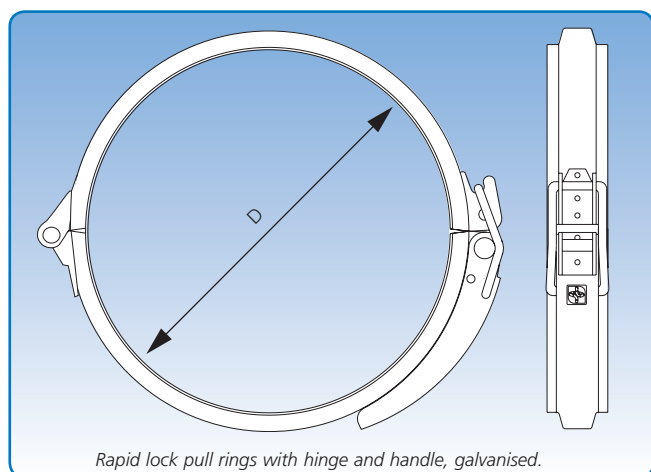

Diameter: $\varnothing 80 - \varnothing 400$ mm.

Handle is extended and made of a strong material for hand operation of rapid lock pull rings.

The powerful steel spring ensures high quality opening/closing mechanism and long service life.

Supplied individually.

Rapid lock pull rings with hinge and handle, galvanised.

Item no.	D mm	Weight kg
GRLC080	80	1,90
GRLC100	100	2,10
GRLC120	120	2,30
GRLC140	140	2,50
GRLC150	150	2,60
GRLC160	160	2,80
GRLC180	180	3,00
GRLC200	200	3,20
GRLC225	225	3,40
GRLC250	250	3,70
GRLC275	275	3,90
GRLC300	300	4,20
GRLC350	350	4,80
GRLC400	400	5,30